



BUILT. TESTED. PERFECTED.
2025 POCKET SALES GUIDE

TABLE OF CONTENTS

INTRODUCTION	4
WARRANTY INFORMATION	6
AERO CORE DECK	12

STAND ON

LINEUP	8
STANDER ZK	13-18
AUTONOMOUS ZK	19-24
STANDER LG	25-30
STANDER X	31-36
STANDER I	37-42
STANDER B.....	43-48

MID MOUNT

LINEUP	9
ZXT	49-54
ZXL	55-60

WALK - BEHIND

LINEUP	10
VELKE LC	61-66
VELKE HC	67-72

ACCESSORIES

GRASS GOBBLER	73
WRIGHTVAC	74
COLLECTION BAG/BUCKET	75
MULCH KIT	76
NORTHERN BAFFLE KIT	77
BLADES	77
VELKE SULKY	78
TWEELS / TIRES	79
PARTS LOOKUP	80

LINEUP COMPARISON	81-84
--------------------------------	-------

PRICING	85-88
----------------------	-------

WRIGHT OWNERS GROUP & CONTACT	89-90
--	-------

NOTES	91-92
--------------------	-------

**BUILT.
TESTED.
PERFECTED.**





Wright mowers are crafted for landscapers and entrepreneurs who prioritize productivity and profitability. Our team, based out of our Frederick, Maryland headquarters, is dedicated to transforming your feedback into the next generation of mowers. We're truly honored by the thousands of landscapers who trust and invest in Wright mowers. Thank you for your continued engagement and support.

WARRANTY INFORMATION

COVERAGE OVERVIEW

Effective for units retailed on or after 3/1/2023

Wright Manufacturing, Inc. (WMI) offers a limited warranty to the original retail purchaser of new WMI power equipment. This warranty ensures that equipment is free from manufacturing defects in materials or workmanship. Below is a detailed breakdown of the warranty coverage, terms, and exclusions to help address common questions.

STANDARD WARRANTY COVERAGE

All Wright Equipment:

- 2 years/unlimited hours OR 5 years/500 hours (whichever comes first).

Rental Use:

- Limited to 90 days.

Service Parts:

- Covered under a 90-day warranty.

Engines:

- Warranty coverage is provided by the engine manufacturer.
- For optimal service, engine repairs should be performed by an Authorized Engine Dealer who is also a Wright Authorized Service Dealer.

DEALER DEMO UNITS

- Demo units with less than 50 hours when first retailed are covered by this limited warranty.
- Proof of purchase is required for all warranty claims, and claims must be processed through an Wright Authorized Service Dealer.

TERMS AND CONDITIONS

Authorized Dealer Requirement:

- All warranty work must be completed by a Wright Authorized Service Dealer.
- The equipment and defective parts must be delivered to the dealer within the warranty period.

Warranty Registration:

- The warranty is valid only if the registration form is completed online by a Wright Authorized Service Dealer with the correct original retail purchase date.

Parts Coverage:

- The warranty includes the cost of parts and labor (when applicable).
- Coverage applies exclusively to WMI OEM parts and their replacement with genuine WMI OEM parts.

EXCLUSIONS

The following are *not covered* under WMI's warranty:

Wear and Tear:

- Normal wear, tear, or damage from exposure (e.g., fading, corrosion).
- Filters, engine oil, hydraulic oil, tires, and tubes.

Impact Damage:

- Bent, fractured, or broken parts due to impact or hard use.

Maintenance Items:

- Routine maintenance, service, or adjustments.
- Clutch linings, bushings, pins, retainers, and similar consumables.

Cosmetic or Non-Structural Issues:

- Paint fading, corrosion, or abrasion.
- Fabric, cushions, grips, cutting blades, light bulbs, and fuses.

Unauthorized Repairs:

- Damage resulting from unauthorized or improperly performed repairs.

External Damage:

- Fire or water damage.

IMPORTANT RECOMMENDATIONS

Use OEM Parts:

- To maintain warranty coverage and equipment performance, always use genuine Wright parts.

Service Location:

- Warranty service is best performed by your original servicing dealer, as they are familiar with your equipment's history.

STAND

HEAVY DUTY COMMERCIAL



STANDBY ZK

52" | 61" | 72"

Vanguard | 61G8 | 40HP
Kawasaki | FX820 EVO | 34.5HP

Pumps: Hydro-Gear 16cc w/fans
Motors: Hydro-Gear 15 cu-in



STANDBY X

48" | 52"

Kawasaki | FX730 | 23.5HP

Pumps: Hydro-Gear 12cc w/fans
Motors: Parker 16 cu-in

COMMERCIAL



STANDBY B

32" | 36" | 48" | 52"

Kawasaki | FX600 | 19HP
Kawasaki | FS651 | 22HP

Transaxle: Hydro-Gear ZT-3100



STANDER® LG

52" | 61"

Kawasaki | FX820 EVO | 34.5HP

Kawasaki | FX850 | 27HP

Transaxle: Hydro-Gear ZT-4400



STANDER® I

36" | 42"

Kawasaki | FX600 | 19HP

Pumps: Hydro-Gear 10cc

Motor: Danfoss 12 cu-in

AUTONOMOUS



STANDER ZK **AUTONOMOUS**

61" | 72"

Vanguard | 61G8 | 40HP

Pumps: Hydro-Gear 16cc w/fans

Motors: Hydro-Gear 15 cu-in

RIDE

HEAVY DUTY COMMERCIAL

ZXT™



52" | 61" | 72"

Vanguard | 61G8 | 40HP OG

Kawasaki | FX1000 | 38.5HP

Pumps: Hydro-Gear 16cc w/fans

Motors: Hydro-Gear 18 cu-in

ZXL



52" | 61"

Kawasaki | FX820 EVO | 34.5HP

Kawasaki | FX850 | 27HP

Transaxle: Hydro-Gear ZT-4400

WALK

HEAVY DUTY COMMERCIAL



VELKE™ LC

52" | 61"

Kawasaki | FX730 | 23.5HP

Pumps: Hydro-Gear 10cc

Motor: Danfoss 12 cu-in



VELKE™ HC

36" | 48"


Kawasaki | FX600 | 19HP

Pumps: Hydro-Gear 10cc

Motor: Danfoss 12 cu-in



AERO CORE™

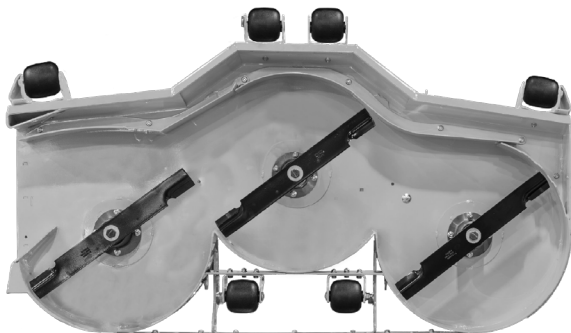

KEY FEATURES

- Slant nose deck adds strength without increasing weight, while the angled lower lip minimizes damage and impact if the deck were to hit an object.
- Bullnose-shaped deck reduces the mower's overall length, allowing for more mowers on a trailer, reduced turning inertia, and closer trimming in corners.
- Laminated upper deck enhances stiffness and reinforces spindle mounting for added durability.
- Deck bridge over the top (featured on most stand-on models) increases deck stiffness, extending the deck's lifespan.
- Trim-side baffle notches guide taller grass into the blade's path for a cleaner trim-side cut.
- Intermediate flow deck baffle balances airflow: open enough for tall/wet grass and controlled enough for lighter grass.
- Optimized discharge opening controls recirculation and minimizes clumping in wet conditions.
- Bolt thread-free cutting chamber, reducing points where grass accumulates inside the deck.
- Mountable rubber chute allows for the use of a Gobbler without removing the deflector.
- Adjustable rubber stripe kit improves striping performance on tall fescue grasses (available for all three bladed decks except the 48 WVHC).
- Optional tight baffles offer more airflow control for light grass or bagging.
- Mulch Kits available for all decks.

BELTS:

- Our proprietary belt design and high temp materials significantly extend the belt life.
- Aramid cords provide long life and minimal stretch over the belt's life.

IDLER ARMS:

- Idler arms pivot on large ball-bearing and reduce maintenance points.
- Compression spring eliminates issues with tension springs breaking from vibration.
- Socket wrench hole in arm makes it easy to install belts with a 1/2" ratchet extension.

DECK PULLEYS:

- Our deck pulleys are 1" larger than most pulleys in the market.
- Larger pulleys allow for reduction in belt tension, flex, and heat, extending the belt's lifespan.

IDLER PULLEYS:

- We use larger idler pulleys which reduce the backward flex of the belt and significantly extend the belt's lifespan.
- Larger idlers spin at lower RPMs which extend the life of the bearings.
- Most of our idlers use double-row bearings significantly extending bearing lifespan.

AERO CORE SPINDLE:

- Heavy-duty bottom cap is shaped to prevent plastic or wire from reaching the lower bearing seal.
- Large bearings extend the life of the spindle.
- Steel reinforced lower bearing seal.
- Center cavity is pre-filled with grease.
- Upper bearing with seals retain the upper grease from settling to the bottom of the spindle, improving the life of the upper bearing.
- Unlike most spindle designs, our bearings are press fit on the shaft and floating in the housing, ensuring bearing alignment and longer bearing life.
- Upper grease chamber with a v-ring seal protects the upper bearing from contamination.
- Upper cap and labyrinth protect the upper bearing if/when pressure washed.
- High carbon shaft is able to withstand impact and thread wear.
- Ductile iron housing can withstand impact and is shaped to improve grass flow through the deck, especially in damp conditions.
- Bottom bolt design makes it easier and faster to change blades with a 1/2" cordless impact.

STANDER® ZK

52"

61"

72"



KEY FEATURES

- Equipped with some of the largest engine and deck options available on the market.
- Wide front casters and light front end make turning easy and light on the turf.
- Wide stance rear tire spacing provides good hillside performance and agile turning.
- Dual wheel kit available for increased traction and lower ground pressure.
- Planetary wheel drives provide high torque and improved control response vs conventional gerotor hydro motors.
- High-flow 16cc pumps with fans keep pressures low and oil cool. Separate left and right systems.
- Dual fuel tanks hold 15.5 gallons of fuel, reducing the need for frequent refills, especially on EFI models.
- Floating engine keeps belts level at all cut heights, critical for high-power applications.
- Dual deck belts ensure all idlers are on the slack side of the belt, significantly extending belt life.
- Dual outlet exhaust keeps peak noise levels down and maintains a steady tone while mowing back and forth, making the mower less noticeable.
- Large chrome ball control rods, innovative hinging control linkages, and ball bearing control pivots for smooth and long-lasting controls.
- Innovative hinging control linkage system avoids complexity, friction, and deterioration of cable-type controls.
- Hundreds of pounds lighter than similar zero-turns.

52"

- Briggs & Stratton | 61G8 | 40HP
- Kawasaki | FX820 EVO | 34.5HP

61"

- Briggs & Stratton | 61G8 | 40HP
- Kawasaki | FX820 EVO | 34.5HP

72"

- Briggs & Stratton | 61G8 | 40HP
- Kawasaki | FX820 EVO | 34.5HP

Engine/ Deck Options

Pumps

Hydro-Gear
16 cc with fans

Motors

Hydro-Gear 15 cu-in Intg.
brake, Indiv. hydro rsrvr.

Drivetrain

Fuel Capacity

15.5 gal

Acres/Hour

52: 6.6

61: 7.7

72: 9.1

Speed

12.5 mph

Productivity

Rear

52: 23 x 10.5-12

61: 24 x 12-12

72: 24 x 12-12

Front

13 x 6.5-6

Tires

Length / Width

52: 67" / 53"

61: 69.5" / 62"

72: 72" / 73"

Weight (lbs.)

52: 1036 - 1062

61: 1124

72: 1202

Dimensions

Cut Height Range

1.5" - 5.5"

Type

Floating-side discharge

Construction

Aero Core™, 7 Gauge Steel

Lift System

Quick-Cut

Blades

52: 18" (3) | 61: 21" (3) | 72: 24.5" (3)

Deck

STANDER® ZK ACCESSORIES

PART NUMBER	ACCESSORY
98470110	TRIMMER
95410047	MOWER JACK ADAPTOR
98490021	FIRE EXT. MOUNTING BRACKET
93460215	BLOCK PLATE
95420008	LIGHT POD KIT
95410044	WEIGHT KIT
95490031; 95490017	COLLECTION BAG (Gen 3 and 2)
95490022	COLLECTION BUCKET
INCLUDED	STRIPE KIT
36490013	15W-50 HYDRO OIL
34490002	HYDRO FILTER

PART NUMBER

PART DESCRIPTION

77410015	BEARING, BALL 1630
77410035	BEARING, BALL, CASTER WHEELS
77460002	BEARING, TAPERED, CASTER ARM
71460164	BELT, DECK, B SECTION 100.04 EL
71460176	BELT, DRIVE, 5L SECTION 60.53 EL
71460078	BELT, WRAPPED, B SECTION 115.04 EL
71460065	BELT, WRAPPED, B SECTION 57.04 EL
71460067	BELT, WRAPPED, B SECTION 66.04 EL
71460013	BELT, WRAPPED, B SECTION 88.04 EL
71460003	BELT, WRAPPED, B SECTION 80.04 EL
71440001	BLADE, 18
71440003	BLADE, 21
71440014	BLADE, 24 1/2
71460111	BUSHING, H, SPLIT TAPERED, MODIFIED 1
14990007	BUSHING, SYNTHETIC, 7/8ID X 1.140D X 1
17410007	CASTER WHEEL BEARING SHIELD
17460023	DUST CAP, METAL, LOW PROFILE
45410022	GROMMET, REMOTE VENT
34490002	HYDRO OIL FILTER 25 MICRON, NON-BYPASS
18410012	KNOB, PLASTIC, T
36490013	OIL, PREMIUM HYDRO, 1QT 15W50
93990003	PAINT, WRIGHT MOWER ORANGE, AEROSOL
77410008	ROD END, 5/16-24
77460016	SEAL, 1.250 X 2.062 X .25
71460207	SPINDLE ASSEMBLY, BOLT ON
16460009	SPRING, DIE, 2.5
52410003	SWITCH, OPC, 2 LB INT SPRING, NO, BLK
52420014	SWITCH, SEALED, BLADE, ON/OFF, RED
95490032	UNIVERSAL, LP, SMOOTH CLAMP KIT
72490003	WHEEL, PLASTIC, SOLID

STANDER® ZK SPECS

SPECIFICATION

MODEL NAME
AND SKU

CATEGORY

FAMILY

CLASS

GENERATION

CONTROL PANEL

OPERATOR CONTROL

HOURLY METER

ENGINE

VENDOR

START TYPE

HORSEPOWER

PRODUCTIVITY

FORWARD SPEED

REVERSE SPEED

FUEL CAPACITY

MAX ACRES/HOUR

DRIVE SYSTEM

TYPE

MOTOR

PUMP

TRANSAXLE

TRANSMISSION

DETAILS

STANDER ZK 52 61G8: WSK52S61G83B
STANDER ZK 52 FX820 EVO: WSK52SFX8203B
STANDER ZK 61 61G8: WSK61S61G83B
STANDER ZK 61 FX820 EVO: WSK61SFX8203B
STANDER ZK 72 61G8: WSK72S61G83B
STANDER ZK 72 FX820 EVO: WSK72SFX8203B

STAND ON

STANDER ZK

HEAVY-DUTY

GEN 3

QUAD LEVER BALL BEARING

DIGITAL

61G8: BRIGGS & STRATTON | FX820 EVO: KAWASAKI

ELECTRIC

61G8: 40HP | FX820 EVO: 34.5HP

12.5 MPH

7 MPH

15.5 GAL

52": 6.57 | 61": 7.7 | 72": 9.09

HYDRO

HYDRO-GEAR 15 CU-IN INTEGRATED BRAKE,
INDIVIDUAL HYDRO RESERVOIR

HYDRO-GEAR 16 CC WITH TAPERED SHAFT & FANS

N/A

N/A

SPECIFICATION

DECK

DECK SIZE	52 IN 61 IN 72 IN
DECK TYPE	FLOATING-SIDE DISCHARGE
CONFIGURATION	AERO CORE
LIFT SYSTEM	QUICK-CUT
BLADE QUANTITY	3
BLADE LENGTH	52": 18 IN 61": 21 IN 72": 24.5 IN
MIN. CUT HEIGHT	1.5 IN
MAX CUT HEIGHT	5.5 IN
STEEL GAUGE	7 GAUGE
SPINDLE TYPE	DUCTILE IRON

DIMENSIONS & WEIGHT

WEIGHT	STANDER ZK 52 61G8: 1130 LB STANDER ZK 52 FX820 EVO: 1110 LB STANDER ZK 61 61G8: 1180 LB STANDER ZK 61 FX820 EVO: 1160 LB STANDER ZK 72 61G8: 1260 LB STANDER ZK 72 FX820 EVO: 1240 LB
LENGTH	BOTH 52" MODELS: 68 IN STANDER ZK 61 61G8: 69.5 IN STANDER ZK 61 FX820 EVO: 70 IN BOTH 72" MODELS: 72 IN
WIDTH WITH DEFLECTOR DOWN	BOTH 52" MODELS: 65.5 IN STANDER ZK 61 61G8: 74.5 IN STANDER ZK 61 FX820 EVO: 75 IN BOTH 72" MODELS: 73 IN
WIDTH WITH DEFLECTOR UP	BOTH 52" MODELS: 53 IN BOTH 61" MODELS: 62 IN BOTH 72" MODELS: 73 IN

CASTER WHEELS

RIM DIAMETER	6 IN
TIRE DIAMETER	13 IN
TIRE WIDTH	6.5 IN

REAR WHEELS

RIM DIAMETER	12 IN
TIRE DIAMETER	24 IN
TIRE WIDTH	12 IN

STANDER ZK **AUTONOMOUS**

61"

72"



KEY FEATURES

- Eliminates the need for job applications, health insurance, sick days, and dealing with turnover, solving staffing challenges for your business.
- Save jobs as a favorite and set the precise stripe angle for week-to-week efficiency and perfection.
- Includes remote control with secure e-stop control for supervised operations.
- Offered with 72" mulching deck.
- Equipped with four depth sensing cameras to monitor a safety boundary around the mower, ensuring safe operation.
- Cameras enable the mower to deviate and drive around larger stationary objects in open areas, minimizing downtime.
- Productivity of a wide area mower, but lower cost, easier to transport, and more versatile.
- Provides access to unprecedented data that helps increase efficiency and optimize mowing operations.
- Achieves a perfect, consistent cut with straight stripes, delivering a professional finish.
- Includes a service agreement with the Greenzie autonomous system to ensure reliable performance and peace of mind.

**THE RIGHT SITES + THE RIGHT PLAN + THE RIGHT PEOPLE
= REVENUE + PRODUCTIVITY²**

61"

- Briggs & Stratton | 61G8 | 40HP

72"

- Briggs & Stratton | 61G8 | 40HP

**Engine/
Deck Options**

Pumps

Hydro-Gear
16 cc with fans

Motors

Hydro-Gear 15 cu-in Intg.
brake, Indiv. hydro rsrv.

Drivetrain

Fuel Capacity

15.5 gal

Acres/Hour

62: 7.1

72: 8.3

Productivity

Speed

10.5 mph

Rear

24 x 12 - 12

Front

13 x 6.5 - 6

Tires

Length / Width

61: 70" / 62"

72: 72" / 73"

Weight (lbs.)

61: 1310

72: 1380

Dimensions

Cut Height Range

1.5" - 5.5"

Type

Mulching

Construction

Aero Core™, 7 Gauge Steel

Lift System

Quick-Cut

Blades

61: 21" (3) | 72: 24.5" (3)

Deck

20

STANDER ZK

AUTONOMOUS

ACCESSORIES

PART NUMBER	ACCESSORY
98470110	TRIMMER
95410047	MOWER JACK ADAPTOR
98490021	FIRE EXT. MOUNTING BRACKET
93460215	BLOCK PLATE
95420008	LIGHT POD KIT
95410044	WEIGHT KIT
95490031; 95490017	COLLECTION BAG (Gen 3 and 2)
95490022	COLLECTION BUCKET
INCLUDED	STRIPE KIT
36490013	15W-50 HYDRO OIL
34490002	HYDRO FILTER

PART NUMBER

PART DESCRIPTION

77410015	BEARING, BALL 1630
77410035	BEARING, BALL, CASTER WHEELS
77460002	BEARING, TAPERED, CASTER ARM
71460164	BELT, DECK, B SECTION 100.04 EL
71460078	BELT, WRAPPED, B SECTION 115.04 EL
71460067	BELT, WRAPPED, B SECTION 66.04 EL
71460003	BELT, WRAPPED, B SECTION 80.04 EL
71490003	BLADE, MULCHING, 21
71490004	BLADE, MULCHING, 24 1/2
14990002	BUSHING, BRONZE 0.5060ID X 0.7480OD X 1L
71460111	BUSHING, H, SPLIT TAPERED, MODIFIED 1
14990007	BUSHING, SYNTHETIC, 7/8ID X 1.140D X 1
17410007	CASTER WHEEL BEARING SHIELD
17460023	DUST CAP, METAL, LOW PROFILE
45410022	GROMMET, REMOTE VENT
34490002	HYDRO OIL FILTER 25 MICRON, NON-BYPASS
18410012	KNOB, PLASTIC, T
15990004	MACHINE KEY 5MM X 5MM X 25MM
36490013	OIL, PREMIUM HYDRO, 1QT 15W50
93990003	PAINT, WRIGHT MOWER ORANGE, AEROSOL
71460142	PULLEY, SNGL SPLIT, A/B, 15MM X 5.50D
77410008	ROD END, 5/16-24
77460016	SEAL, 1.250 X 2.062 X .25
71460207	SPINDLE ASSEMBLY, BOLT ON
16460009	SPRING, DIE, 2.5
52420008	SWITCH, IGN, ELECT START W/ BELL KEY
52410003	SWITCH, OPC, 2 LB INT SPRING, NO, BLK
17460023	SWITCH, SEALED, BLADE, ON/OFF, RED
95490032	UNIVERSAL, LP, SMOOTH CLAMP KIT
72490003	WHEEL, PLASTIC, SOLID

STANDER ZK

AUTONOMOUS

SPECS

SPECIFICATION	DETAILS
MODEL NAME AND SKU	AUTONOMOUS ZK 61 61G8: WSZK61M61G8E2BR AUTONOMOUS ZK 72 61G8: WSZK72M61G8E2BR
CATEGORY	STAND ON
FAMILY	AUTONOMOUS ZK
CLASS	HEAVY-DUTY
GENERATION	GEN 3
CONTROL PANEL	
OPERATOR CONTROL	QUAD LEVER BALL BEARING
HOUR METER	DIGITAL
ENGINE	
VENDOR	61G8: BRIGGS & STRATTON
START TYPE	ELECTRIC
HORSEPOWER	40HP
PRODUCTIVITY	
FORWARD SPEED	12.5 MPH
REVERSE SPEED	7 MPH
FUEL CAPACITY	15.5 GAL
MAX ACRES/HOUR	9.09
DRIVE SYSTEM	
TYPE	HYDRO
MOTOR	HYDRO-GEAR 15 CU-IN INTEGRATED BRAKE, INDIVIDUAL HYDRO RESERVOIR
PUMP	HYDRO-GEAR 16 CC WITH HSA & FANS
TRANSAXLE	N/A
TRANSMISSION	N/A

SPECIFICATION

DECK

DECK SIZE	61 IN 72 IN
DECK TYPE	FLOATING-SIDE DISCHARGE
CONFIGURATION	AERO CORE
LIFT SYSTEM	QUICK-CUT
BLADE QUANTITY	3
BLADE LENGTH	61": 21" 72": 24.5 IN
MIN. CUT HEIGHT	1.5 IN
MAX CUT HEIGHT	5.5 IN
STEEL GAUGE	7 GAUGE
SPINDLE TYPE	DUCTILE IRON

DIMENSIONS & WEIGHT

WEIGHT	AUTONOMOUS ZK 61 61G8: 1310 LB AUTONOMOUS ZK 72 61G8: 1380 LB
LENGTH	AUTONOMOUS ZK 61 61G8: 70 IN AUTONOMOUS ZK 72 61G8: 72 IN
WIDTH WITH DEFLECTOR DOWN	AUTONOMOUS ZK 61 61G8: 74.5 IN AUTONOMOUS ZK 72 61G8: 85 IN
WIDTH WITH DEFLECTOR UP	AUTONOMOUS ZK 61 61G8: 62 IN AUTONOMOUS ZK 72 61G8: 73 IN

CASTER WHEELS

RIM DIAMETER	6 IN
TIRE DIAMETER	13 IN
TIRE WIDTH	6.5 IN

REAR WHEELS

RIM DIAMETER	12 IN
TIRE DIAMETER	24 IN
TIRE WIDTH	12 IN

STANDER® LG

52"

61"



KEY FEATURES

- Heavy-duty integrated transmissions with large 1 3/8" axles increase reliability and reduce parts count.
- Integrated transmissions with variable speed pump swashplate mounted on journal bearings improve control response and feel.
- Compared to the Stander X and ZK, the Stander LG engine is mounted to the frame rather than traveling with the deck.
- Large central 11-gallon fuel tank improves visibility and keeps rotational inertia near the center for better responsiveness and agility.
- Single gas cap and central fuel gauge for faster and easier use compared to dual tanks.
- Large 24-inch rear tires provide maximum control and comfort.
- Heavy-duty large-section frame and super-sized caster pivots offer ultimate ruggedness over the mower's life.
- Wide platform with aggressive tread and extended travel for additional stability and comfort.
- Larger engine than Stander X for more efficiency and longer lifespan, reducing total lifecycle cost.
- Simple and low-tech "one relay" electrical system for less chance of issues and easier servicing.
- Sealed connection points and enclosed fuse/relay box protect critical components from rain and wash-down.
- Improved guard protects the front of the engine.

- Kawasaki | FX820 EVO | 34.5HP
- Kawasaki | FX850 | 27HP

- Kawasaki | FX820 EVO | 34.5HP
- Kawasaki | FX850 | 27HP

Engine/ Deck Options

Transaxle
Hydro-Gear
ZT-4400

Drivetrain

Fuel Capacity
11 gal

Acres/Hour
52: 6.6
61: 7.7

Speed
12.5 mph

Productivity

Rear
52: 23 x 9.5-12
61: 24 x 12-12

Front
13 x 6.5-6

Tires

Length / Width
52: 70.5" / 53"
61: 71" / 62"

Weight (lbs.)
52: 1080
61: 1180

Dimensions

Cut Height Range
1.75" - 5.75"

Type
Floating-side discharge

Construction
Aero Core™, 7 Gauge Steel

Lift System Quick-Cut

Blades
52: 18" (3) | 61: 21" (3)

Deck

STANDER[®] LG ACCESSORIES

PART NUMBER	ACCESSORY
98470110	TRIMMER
95410047	MOWER JACK ADAPTOR
98490021	FIRE EXT. MOUNTING BRACKET
93460215	BLOCK PLATE
95420008	LIGHT POD KIT
N/A	WEIGHT KIT
N/A	COLLECTION BAG
95490029	COLLECTION BUCKET
INCLUDED	STRIPE KIT
36490013	15W-50 HYDRO OIL
39410411	HYDRO FILTER

PART NUMBER

PART DESCRIPTION

77410015	BEARING, BALL 1630
71460109	BEARING, BALL 6202-2RLD-C3, CUSTOM GREASE
77410035	BEARING, BALL, CASTER WHEELS
71460210	BELT, EPDM, 5L, 73 EL
71460197	BELT, EPDM, B SECTION 134.33 EL
71460199	BELT, EPDM, B SECTION 151.44 EL
71440001	BLADE, 18
71440003	BLADE, 21
71460111	BUSHING, H, SPLIT TAPERED, MODIFIED, 1
25410007	BUSHING, SYNTHETIC, 0.750ID X 0.875 X 0.8125
14990007	BUSHING, SYNTHETIC, 7/8ID X 1.140D X 1
17460005	BUSHING, URETHANE 3/4 X 1 1/8 X 3/4
17410007	CASTER WHEEL BEARING SHIELD
52460002	CHOKE CABLE
17460025	DUST CAP, PLASTIC, 2.75 OD
45410022	GROMMET, REMOTE VENT
18410012	KNOB, PLASTIC, T
15990003	MACHINE KEY 1/4 X 1/4 X 1
36490013	OIL, PREMIUM HYDRO, 1QT 15W50
93990003	PAINT, WRIGHT MOWER ORANGE, AEROSOL
77410008	ROD END, 5/16-24
77410018	ROD END, 5/16-24, STUD (LH/RH)
71460207	SPINDLE ASSEMBLY, BOLT ON
16460009	SPRING, DIE, 2.5
17460018	STRIPING RUBBER ADJUSTABLE 48/52
52410003	SWITCH, OPC, 2 LB INT SPRING, NO, BLK
52420014	SWITCH, SEALED, BLADE, ON/OFF, RED
52420002	THROTTLE CABLE
72460039	WHEEL ASSY, CASTER, 13 X 5.00 - 6
72490003	WHEEL, PLASTIC, SOLID

STANDER[®] LG SPECS

SPECIFICATION

MODEL NAME
AND SKU

CATEGORY

FAMILY

CLASS

GENERATION

CONTROL PANEL

OPERATOR CONTROL

HOURLY METER

ENGINE

VENDOR

START TYPE

HORSEPOWER

PRODUCTIVITY

FORWARD SPEED

REVERSE SPEED

FUEL CAPACITY

MAX ACRES/HOUR

DRIVE SYSTEM

TYPE

MOTOR

PUMP

TRANSAXLE

TRANSMISSION

DETAILS

STANDER LG 52 FX820 EVO: WSLG52SFX8201B
STANDER LG 52 FX850E: WSLG52SFX8501B
STANDER LG 61 FX820 EVO: WSLG61SFX8201B
STANDER LG 61 FX850E: WSLG61SFX8501B

STAND ON

STANDER ZK

HEAVY-DUTY

GEN 1

QUAD LEVER BALL BEARING

DIGITAL

FX820 EVO: KAWASAKI | FX850E: KAWASAKI

ELECTRIC

FX820 EVO: 34.5HP | FX850: 27HP

12.5 MPH

8 MPH

11 GAL

52": 6.57 | 61": 7.7

HYDRO

N/A

N/A

HYDRO-GEAR ZT4400

N/A

SPECIFICATION

DECK

DECK SIZE	52 IN 61 IN
DECK TYPE	FLOATING-SIDE DISCHARGE
CONFIGURATION	AERO CORE
LIFT SYSTEM	QUICK-CUT
BLADE QUANTITY	3
BLADE LENGTH	52": 18 IN 61": 21 IN
MIN. CUT HEIGHT	1.75 IN
MAX CUT HEIGHT	5.75 IN
STEEL GAUGE	7 GAUGE
SPINDLE TYPE	DUCTILE IRON

DIMENSIONS & WEIGHT

WEIGHT	BOTH 52" MODELS: 1080 LB BOTH 61" MODELS: 1180 LB
LENGTH	BOTH 52" MODELS: 71 IN BOTH 61" MODELS: 71.5 IN
WIDTH WITH DEFLECTOR DOWN	BOTH 52" MODELS: 65.5 IN BOTH 61" MODELS: 74.5 IN
WIDTH WITH DEFLECTOR UP	BOTH 52" MODELS: 53 IN BOTH 61" MODELS: 62 IN

CASTER WHEELS

RIM DIAMETER	6 IN
TIRE DIAMETER	13 IN
TIRE WIDTH	5 IN

REAR WHEELS

RIM DIAMETER	12 IN
TIRE DIAMETER	24 IN
TIRE WIDTH	52": 9.5 IN 61": 12 IN

STANDER® X

48"

52"

61"



KEY FEATURES

- Large chrome ball control rods, innovative hinging control linkages, and ball bearing control pivots for smooth and long-lasting controls.
- Innovative hinging control linkage system avoids complexity, friction, and deterioration of cable-type controls.
- Pump belt drive optimized with large pulleys, strong steel idler with advanced bearing seals, and high-temp belt materials for longer life and lower operating costs.
- Superior deck drive with separate left and right drive belts, no tight side idlers, and large deck idlers with double-row bearings for reliable operation and lower operating costs.
- Separate left and right hydro pumps with dual cooling fans for longer life and reduced risk of cross-contamination.
- Sealed caster housings and heavy-duty deep groove ball bearing wheels eliminate the need for grease.
- Deck lift mounted on stainless steel shafts and synthetic bushings for years of durability without maintenance.
- Proven push-button deck lift makes raising and lowering the deck easy.
- 8-gallon fuel tank with a three-layer thick-wall construction, featuring a hermetically sealed and magnetically controlled white face fuel gauge.
- Larger section 1 ½" x 2 ½" thick wall frame tube for a stiffer longer-lasting frame.
- Elastomer spring suspension for improved operator comfort.
- Rear bagger not offered on the Stander X. For bagging, consider Stander LG or ZK models with larger engines and drivetrains.

48" - Kawasaki FX730 23.5HP 52" - Kawasaki FX730 23.5HP		Engine/ Deck Options
Pumps Hydro-Gear 12 cc with fans	Motors 15 cu-in	Drivetrain
Fuel Capacity 8 gal Speed 9.5 mph	Acres/Hour 48: 4.6 52: 5.0	Productivity
Rear 20 x 10-8	Front 13 x 5-6	Tires
Length / Width 48: 65" / 49" 52: 66" / 53"	Weight (lbs.) 48: 900 52: 920	Dimensions
Cut Height Range 1.5" - 5.5" Type Floating-side discharge Construction Aero Core™, 7 Gauge Steel Lift System Quick-Cut Blades 48: 16.5" (3) 52: 18" (3)		Deck
		32

STANDER X ACCESSORIES

PART NUMBER	ACCESSORY
98470110	TRIMMER
95410047	MOWER JACK ADAPTOR
98490021	FIRE EXT. MOUNTING BRACKET
93460215	BLOCK PLATE
95420008	LIGHT POD KIT
N/A	WEIGHT KIT
95490014	COLLECTION BAG
95490024	COLLECTION BUCKET
INCLUDED	STRIPE KIT
36490013	15W-50 HYDRO OIL
34490002	HYDRO FILTER



PART NUMBER	PART DESCRIPTION
77410035	BEARING, BALL, CASTER WHEELS
72490003	BEARING, TAPERED, CASTER ARM
71460176	BELT, DRIVE, 5L SECTION 60.53 EL
71460070	BELT, WRAPPED, B SECTION 52.04 EL
71460065	BELT, WRAPPED, B SECTION 57.04 EL
71460123	BELT, WRAPPED, B SECTION 78.04 EL
71460107	BELT, WRAPPED, B SECTION 84.04 EL
71440002	BLADE, 16 1/2
71440001	BLADE, 18
14990007	BUSHING, SYNTHETIC, 7/8ID X 1.14OD X 1
17410007	CASTER WHEEL BEARING SHIELD
52460002	CHOKE CABLE
17460023	DUST CAP, METAL, LOW PROFILE
45410022	GROMMET, REMOTE VENT
34490002	HYDRO OIL FILTER 25 MICRON, NON-BYPASS
18410012	KNOB, PLASTIC, T
15990004	MACHINE KEY 5MM X 5MM X 25MM
36490013	OIL, PREMIUM HYDRO, 1QT 15W50
93990003	PAINT, WRIGHT MOWER ORANGE, AEROSOL
71460009	PULLEY, IDLER, 5 X 1 1/4 X 3/8 BORE
71460142	PULLEY, SNGL SPLIT, A/B, 15MM X 5.5 OD
77410008	ROD END, 5/16-24
77460016	SEAL, 1.250 X 2.062 X.25
71460207	SPINDLE ASSEMBLY, BOLT ON
16460009	SPRING, DIE, 2.5
52420008	SWITCH, IGN, ELECT START W/ BELL KEY
52410003	SWITCH, OPC, 2 LB INT SPRING, NO, BLK
52420014	SWITCH, SEALED, BLADE, ON/OFF, RED
52420002	THROTTLE CABLE
72490003	WHEEL, PLASTIC, SOLID

STANDER[®]X SPECS

SPECIFICATION

DETAILS

MODEL NAME
AND SKU

STANDER X 48 FX730E: WSTX48SFX730E2B
STANDER X 52 FX730E: WSTX52SFX730E2B

CATEGORY

STAND ON

FAMILY

STANDER X

CLASS

HEAVY-DUTY

GENERATION

GEN 2

CONTROL PANEL

OPERATOR CONTROL

QUAD LEVER BALL BEARING

HOURLY METER

DIGITAL

ENGINE

VENDOR

FX730E: KAWASAKI

START TYPE

ELECTRIC

HORSEPOWER

23.5HP

PRODUCTIVITY

FORWARD SPEED

9.5 MPH

REVERSE SPEED

5.5 MPH

FUEL CAPACITY

8 GAL

MAX ACRES/HOUR

48": 4.61 | 52": 4.99

DRIVE SYSTEM

TYPE

HYDRO

MOTOR

PARKER 16 CU-IN

PUMP

HYDRO-GEAR 12 CC WITH FANS

TRANSAXLE

N/A

TRANSMISSION

N/A

SPECIFICATION

DETAILS

DECK

DECK SIZE	48 IN 52 IN
DECK TYPE	FLOATING-SIDE DISCHARGE
CONFIGURATION	AERO CORE
LIFT SYSTEM	QUICK-CUT
BLADE QUANTITY	3
BLADE LENGTH	48": 16.5 IN 52": 18 IN
MIN. CUT HEIGHT	1.5 IN
MAX CUT HEIGHT	5.5 IN
STEEL GAUGE	7 GAUGE
SPINDLE TYPE	DUCTILE IRON

DIMENSIONS & WEIGHT

WEIGHT	STANDER X 48 FX730E: 900 LB STANDER X 52 FX730E: 920 LB
LENGTH	STANDER X 48 FX730E: 65 IN STANDER X 52 FX730E: 66 IN
WIDTH WITH DEFLECTOR DOWN	STANDER X 48 FX730E: 62 IN STANDER X 52 FX730E: 65 IN
WIDTH WITH DEFLECTOR UP	STANDER X 48 FX730E: 49 IN STANDER X 52 FX730E: 53 IN

CASTER WHEELS

RIM DIAMETER	6 IN
TIRE DIAMETER	13 IN
TIRE WIDTH	5 IN

REAR WHEELS

RIM DIAMETER	8 IN
TIRE DIAMETER	24 IN
TIRE WIDTH	10 IN

STANDER® I

36"

42"



KEY FEATURES

- Fully floating deck.
- Pump and motor drivetrain allow for a wider platform and wide rear tires.
- The platform is fully between the wheel motors placing the operator's weight precisely where it needs to be, which is critical to the balance of a narrow and nimble machine.
- Engine floats with the deck. Most short stand-on mowers require a lot of belt angle as the deck is raised and lowered shortening the belt life. Moving the engine with the deck means no excessive belt wear when cutting Bermuda Grass at 1.5" or St. Augustine at 5".
- Uniquely low center of gravity, critical for maneuverability with a narrow mower.
- Innovative hinging control system eliminates the need for cables, ensuring responsive controls for years.
- Elastomer platform suspension provides both spring and shock absorption.
- Locking pushbutton handle allows us to "over spring" the deck so it is easy to lift yet doesn't bounce.
- Caster wheels located close together for better trim access near trees and mulch beds.
- Sealed caster housings and heavy-duty deep groove ball bearing wheels eliminate the need for grease.
- Skid plate behind the deck prevents deck baffles from snagging the ground, especially when going over the top of a hill.

- Kawasaki | FX600 | 19HP

- Kawasaki | FX600 | 19HP

Engine/ Deck Options

Hydro-Gear
10 cc

12 cu-in

Drivetrain

5.5 gal

36: 3.0

Productivity

8.2 mph

36: 18 x 8.5-10
42: 18 x 8.5-10

11 x 4-5

Tires

36: 62" / 36.5"

36: 717

Dimensions

1.5" - 5"

Floating-side discharge

Aero Core™, 7 Gauge Steel

Quick-Cut

36: 18" (2) | 42: 21" (2)

Deck

STANDER'I ACCESSORIES

PART NUMBER	ACCESSORY
98470110	TRIMMER
95410047	MOWER JACK ADAPTOR
98490021	FIRE EXT. MOUNTING BRACKET
93460215	BLOCK PLATE
95420008	LIGHT POD KIT
N/A	WEIGHT KIT
95490015	COLLECTION BAG
95490027	COLLECTION BUCKET
N/A	STRIPE KIT
36490013	15W-50 HYDRO OIL
34490002	HYDRO FILTER

PART NUMBER

PART DESCRIPTION

77410035	BEARING, BALL, CASTER WHEELS
77460002	BEARING, TAPERED, CASTER ARM
71460180	BELT, EPDM, A, 51.22 EL
71460036	BELT, EPDM, B SECTION 123.04 EL
71460066	BELT, WRAPPED, A SECTION 55.24 EL
71460063	BELT, WRAPPED, B SECTION 70.04 EL
71460107	BELT, WRAPPED, B SECTION 84.04 EL
71460009	PULLEY, IDLER, 5 X 1 1/4 X 3/8 BORE
71440002	BLADE, 16 1/2
71440001	BLADE, 18
71440003	BLADE, 21
17410007	CASTER WHEEL BEARING SHIELD
52460002	CHOKE CABLE
17460023	DUST CAP, METAL, LOW PROFILE
45410022	GROMMET, REMOTE VENT
34490002	HYDRO OIL FILTER 25 MICRON, NON-BYPASS
18410012	KNOB, PLASTIC, T
15990004	MACHINE KEY 5MM X 5MM X 25MM
93990003	PAINT, WRIGHT MOWER ORANGE, AEROSOL
71460009	PULLEY, IDLER, 5 X 1 1/4 X 3/8 BORE
71460142	PULLEY, SNGL SPLIT, A/B, 15MM X 5.5 OD
53490019	RELAY, 40 AMP, SEALED W/ RESISTOR
77410008	ROD END, 5/16-24
77460016	SEAL, 1.250 X 2.062 X.25
71460207	SPINDLE ASSEMBLY, BOLT ON
16460009	SPRING, DIE, 2.5
52420008	SWITCH, IGN, ELECT START W/ BELL KEY
52410003	SWITCH, OPC, 2 LB INT SPRING, NO, BLK
52420014	SWITCH, SEALED, BLADE, ON/OFF, RED
52420002	THROTTLE CABLE

STANDER® I SPECS

SPECIFICATION

MODEL NAME
AND SKU

CATEGORY

FAMILY

CLASS

GENERATION

CONTROL PANEL

OPERATOR CONTROL

HOURLY METER

ENGINE

VENDOR

START TYPE

HORSEPOWER

PRODUCTIVITY

FORWARD SPEED

REVERSE SPEED

FUEL CAPACITY

MAX ACRES/HOUR

DRIVE SYSTEM

TYPE

MOTOR

PUMP

TRANSAXLE

TRANSMISSION

DETAILS

STANDER I 36 FX600E: WSTN36SFX600E1B
STANDER I 42 FX600E: WSTN42SFX600E1B

STAND ON

STANDER INTENSITY

HEAVY-DUTY

GEN 1

QUAD LEVER BALL BEARING

DIGITAL

FX600E: KAWASAKI

ELECTRIC

19HP

8.2 MPH

3.5 MPH

5.5 GAL

36": 2.98 | 42": 3.48

HYDRO

DANFOSS 12 CU-IN

HYDRO-GEAR 10 CC

N/A

N/A

SPECIFICATION

DECK

DECK SIZE	36 IN 42 IN
DECK TYPE	FLOATING-SIDE DISCHARGE
CONFIGURATION	AERO CORE
LIFT SYSTEM	QUICK-CUT
BLADE QUANTITY	2
BLADE LENGTH	36": 18 IN 42": 21 IN
MIN. CUT HEIGHT	1.5 IN
MAX CUT HEIGHT	5 IN
STEEL GAUGE	7 GAUGE
SPINDLE TYPE	DUCTILE IRON

DIMENSIONS & WEIGHT

WEIGHT	STANDER 36 FX600E: 717 LB STANDER 42 FX600E: 740 LB
LENGTH	STANDER 36 FX600E: 62 IN STANDER 42 FX600E: 70 IN
WIDTH WITH DEFLECTOR DOWN	STANDER 36 FX600E: 49.5 IN STANDER 42 FX600E: 55 IN
WIDTH WITH DEFLECTOR UP	STANDER 36 FX600E: 36.5 IN STANDER 42 FX600E: 42.5 IN

CASTER WHEELS

RIM DIAMETER	5 IN
TIRE DIAMETER	11 IN
TIRE WIDTH	4 IN

REAR WHEELS

RIM DIAMETER	10 IN
TIRE DIAMETER	18 IN
TIRE WIDTH	8.5 IN

STANDER® B

32"

36"

48"

52"



KEY FEATURES

- Engine fixed to the frame, allowing us to give you more for your money with integrated transmissions.
- 32" and 36" decks are ideal for gates and tight areas. 48" and 52" decks are ideal for medium-sized properties.
- Main difference between narrow and larger frame models: The 48" and 52" models have wider tires, longer axles, wider platform, and a wider frame. The 32" and 36" models use lower profile tires.
- Heavy-duty Kawasaki FX600 with premium commercial features and an external air cleaner. Kawasaki FS models provide the same heavy-duty internal components but with an integrated air filter.
- 20" rear tires provide good traction and a close turning radius around trees and mulch beds.
- Clear fuel tank for easy viewing of fuel level, with a side opening pad for easy access to fill the tank.
- Flat-free caster tires with deep groove ball bearing wheels eliminate the need for grease.
- Equipped with square-nosed decks. The large frame models have a laminated 11ga top while the small frame models are made from heavy 7ga steel.
- The airflow is the same as the Aero Core flat-back deck and accepts standard blades. Mulch kits are available for all deck sizes.
- Aluminum spindles use the same size bearings as other models but with standard seals.
- The transmission is equipped with the steel cut gears used in the ZT-3400 transaxle.

32" - Kawasaki FX600 19HP 36" - Kawasaki FX600 19HP 48" - Kawasaki FS651 22HP 52" - Kawasaki FS651 22HP		Engine/ Deck Options
Transmission Hydro-Gear ZT-3100		Drivetrain
Fuel Capacity 5 gal	Acres/Hour 32: 2.4 36: 2.6 48: 3.5 52: 3.7	Productivity
Speed 7 mph		
Rear 32: 20 x 6.5-8 36: 20 x 8-10 48/52: 20 x 10-8	Front 11 x 4-5	Tires
Length / Width 32: 66.5" / 34" 36: 66.5" / 38" 48: 65.75" / 49" 52: 65.75" / 53"	Weight (lbs.) 32: 703 36: 713 48: 780 52: 800	Dimensions
Cut Height Range 2" - 5" Floating Construction Square Nosed 11 Gauge Laminate Blades 32: 16.5" (2) 36: 18" (2) 48: 16.5 " (3) 52: 18" (3)		Deck
		44

PART NUMBER	ACCESSORY	32" AND 36"
N/A	TRIMMER	
N/A	MOWER JACK ADAPTOR	
98490021	FIRE EXT. MOUNTING BRACKET	
93460215	BLOCK PLATE	
95420008	LIGHT POD KIT	
N/A	WEIGHT KIT	
95490020	COLLECTION BAG	
95490025	COLLECTION BUCKET	
N/A	STRIPE KIT	
36490013	15W-50 HYDRO OIL	
34490007	HYDRO FILTER	

PART NUMBER	ACCESSORY	48" AND 52"
98470110	TRIMMER	
95410047	MOWER JACK ADAPTOR	
98490021	FIRE EXT. MOUNTING BRACKET	
93460215	BLOCK PLATE	
95420008	LIGHT POD KIT	
N/A	WEIGHT KIT	
95490020	COLLECTION BAG	
95490025	COLLECTION BUCKET	
98460074	STRIPE KIT	
36490013	15W-50 HYDRO OIL	
34490007	HYDRO FILTER	



PART NUMBER

PART DESCRIPTION

77460003	BEARING RACE, CASTER ARM
77410015	BEARING, BALL 1630
77410035	BEARING, BALL, CASTER WHEELS
77460002	BEARING, TAPERED, CASTER ARM
71460190	BELT, EPDM, A SECTION, 61.04 EL
18410012	BELT, EPDM, A SECTION 50.25 EL
71460040	BELT, EPDM, B SECTION 102.25 EL
71460036	BELT, EPDM, B SECTION 123.04 EL
71460085	BELT, EPDM, B SECTION 131.04 EL
71460071	BELT, EPDM, B SECTION 96.04 EL
71440002	BLADE, 16 1/2
71440001	BLADE, 18
14990007	BUSHING, SYNTHETIC, 7/8ID X 1.140D X 1
17410007	CASTER WHEEL BEARING SHIELD
52460002	CHOKE CABLE
17460023	DUST CAP, METAL, LOW PROFILE
45410029	GROMMET, PICKUP, ORANGE, FLEX
18410012	KNOB, PLASTIC, T
36490013	OIL, PREMIUM HYDRO, 1QT 15W50
93990003	PAINT, WRIGHT MOWER ORANGE, AEROSOL
77410008	ROD END, 5/16-24
77410009	ROD END, 5/16-24 LH
77460016	SEAL, 1.250 X 2.062 X.25
16460009	SPRING, DIE, 2.5
52420008	SWITCH, IGN, ELECT START W/ BELL KEY
52410003	SWITCH, OPC, 2 LB INT SPRING, NO, BLK
52420014	SWITCH, SEALED, BLADE, ON/OFF, RED
52420002	THROTTLE CABLE
72460032	WHEEL ASSY, CASTER, 11 X 4.00 - 5, BALL BRG
72490003	WHEEL, PLASTIC, SOLID

STANDER B SPECS

SPECIFICATION	DETAILS
MODEL NAME AND SKU	STANDER B 32 FX600E: WSB32SFX6001B STANDER B 36 FX600E: WSB36SFX6001B STANDER B 48 FS651E: WSB48SFS651E1B STANDER B 52 FS651E: WSB52SFS651E1B
CATEGORY	STAND ON
FAMILY	STANDER B
CLASS	ENTRY-COMMERCIAL
GENERATION	GEN 1
CONTROL PANEL	
OPERATOR CONTROL	QUAD LEVER
HOUR METER	DIGITAL
ENGINE	
VENDOR	FX600E: KAWASAKI FS651E: KAWASAKI
START TYPE	ELECTRIC
HORSEPOWER	FX600E: 19HP FS651E: 22HP
PRODUCTIVITY	
FORWARD SPEED	7 MPH
REVERSE SPEED	3 MPH
FUEL CAPACITY	5 GAL
MAX ACRES/HOUR	32": 2.26 36": 2.55 48": 3.39 52": 3.68
DRIVE SYSTEM	
TYPE	HYDRO
MOTOR	N/A
PUMP	N/A
TRANSAXLE	HYDRO-GEAR ZT3100
TRANSMISSION	N/A

SPECIFICATION

DETAILS

DECK

DECK SIZE	32 IN 36 IN 48 IN 52 IN
DECK TYPE	FLOATING-SIDE DISCHARGE
CONFIGURATION	N/A
LIFT SYSTEM	QUICK-CUT
BLADE QUANTITY	32" & 36": 2 48" & 52": 3
BLADE LENGTH	32": 16.5 IN 36": 18 IN 48": 16.5 IN 52": 18 IN
MIN. CUT HEIGHT	2 IN
MAX CUT HEIGHT	5 IN
STEEL GAUGE	32" & 36": 7 GAUGE 48" & 52": 11 GAUGE
SPINDLE TYPE	ALUMINUM

DIMENSIONS & WEIGHT

WEIGHT	STANDER B 32 FX600E: 730 LB STANDER B 36 FX600E: 740 LB STANDER B 48 FS651E: 780 LB STANDER B 52 FS651E: 800 LB
LENGTH	32" & 36": 66.5 IN 48" & 52": 65.75 IN
WIDTH WITH DEFLECTOR DOWN	32": 46 IN 36": 49 IN 48": 62 IN 52": 66 IN
WIDTH WITH DEFLECTOR UP	32": 34 IN 36": 37.5 IN 48": 49 IN 52": 53 IN

CASTER WHEELS

RIM DIAMETER	5 IN
TIRE DIAMETER	11 IN
TIRE WIDTH	4 IN

REAR WHEELS

RIM DIAMETER	32" & 36": 10 IN 48" & 52": 8 IN
TIRE DIAMETER	20 IN
TIRE WIDTH	32": 6.5 IN 36": 8 IN 48" & 52": 10 IN

ZXT

52"

61"

72"



KEY FEATURES

- Long Travel Suspension system isolates the seat and controls from the mower, boosting operator comfort.
- Engine and pump/motor placement lowers the center of gravity, enabling a raised seat for easier access and better comfort for taller operators.
- Durable tubular chassis, bumper, heavy-duty caster pivots, and flat-free casters uncommon in this class, reduce external damage and enhances resale value.
- Hands-free parking brake and deck release.
- Fold-up seat provides quick maintenance access with minimal upkeep required.
- Fully adjustable backrest and armrests with additional seat suspension to absorb small bumps.
- Foldable ROPS and rounded bumper protect against damage during tight turns near obstacles
- Heavy-duty bumper includes a hitch receiver for accessories, while the rear guard protects filters from getting punctured by curbs, stumps, or floor jacks.
- Extra-large high flotation tires.
- Dual fuel tanks hold 15.5 gallons, exceeding most competitors in this class.
- Low-maintenance design with an 8qt hydro oil system and 1,000 hr service interval when using Wright-brand hydro oil.
- Vanguard Oil Guard system with a 5qt external tank for a 500 hr engine oil change interval.
- Engineaire pre-cleaner extends engine filter life by 3x.
- Heavy-duty or sealed pivot points eliminate all grease fittings.

52"

- Briggs & Stratton | 61G8 | 40HP OG
- Kawasaki | FX1000 | 38.5HP

61"

- Briggs & Stratton | 61G8 | 40HP OG
- Kawasaki | FX1000 | 38.5HP

72"

- Briggs & Stratton | 61G8 | 40HP OG
- Kawasaki | FX1000 | 38.5HP

**Engine/
Deck Options****Pumps**

Hydro-Gear
16 cc with fans

Motors

Hydro-Gear 18 cu-in
planetary drive

Drivetrain**Fuel Capacity**

15.5 gal

Acres/Hour

52: 6.8

61: 8.0

72: 9.5

Speed

13 mph

Productivity**Rear**

52: 26 x 9.5-12

61: 26 x 14-12

72: 26 x 14-12

Front

13 x 6.5-6

Tires**Length / Width**

52: 82.5" / 53"

61: 83.5" / 62"

72: 84.5" / 73"

Weight (lbs.)

52: 1491

61: 1521

72: 1551

Dimensions**Cut Height Range**

1.5" - 6"

Type

Floating-side discharge

Construction

Aero Core™, 7 Gauge Steel

Lift System

Foot Pedal Operated

Blades

52: 18" (3) | 61: 21" (3) | 72: 24.5" (3)

Deck



ACCESSORIES

PART NUMBER	ACCESSORY
N/A	TRIMMER
N/A	MOWER JACK ADAPTOR
N/A	FIRE EXT. MOUNTING BRACKET
93460215	BLOCK PLATE
95420008	LIGHT POD KIT
N/A	WEIGHT KIT
N/A	COLLECTION BAG
95490023	COLLECTION BUCKET
INCLUDED	STRIPE KIT
36490013	15W-50 HYDRO OIL
34490002	HYDRO FILTER



PART NUMBER	PART DESCRIPTION
77410015	BEARING, BALL 1630
71460109	BEARING, BALL, 6206-2RLD-C3, CUSTOM GREASE
77410035	BEARING, BALL, CASTER WHEELS
71460196	BELT, EPDM, 5L, 77.56 EL
71460197	BELT, EPDM, B SECTION 134.33 EL
71460198	BELT, EPDM, B SECTION 143.37 EL
71460199	BELT, EPDM, B SECTION 151.44 EL
71460200	BELT, EPDM, B SECTION 57.11 EL
71460201	BELT, EPDM, B SECTION 66.12 EL
71460202	BELT, EPDM, B SECTION 80.27 EL
71440001	BLADE, 18
71440003	BLADE, 21
71440014	BLADE, 24 1/2
71460111	BUSHING, H, SPLIT TAPERED, MODIFIED, 1
14990007	BUSHING, SYNTHETIC, 7/8ID X 1.140D X 1
14990007	BUSHING, SYNTHETIC, 7/8ID X 1.140D X 1
17410007	CASTER WHEEL BEARING SHIELD
17460025	DUST CAP, PLASTIC, 2.75 OD
45410022	GROMMET, REMOTE VENT
34490002	HYDRO OIL FILTER 25 MICRON, NON-BYPASS
18410012	KNOB, PLASTIC, T
15990003	MACHINE KEY 1/4 X 1/4 X 1
36490013	OIL, PREMIUM HYDRO, 1QT 15W50
93990003	PAINT, WRIGHT MOWER ORANGE, AEROSOL
71460207	SPINDLE ASSEMBLY, BOLT ON
16460009	SPRING, DIE, 2.5
52420014	SWITCH, SEALED, BLADE, ON/OFF, RED
95490032	UNIVERSAL, LP, SMOOTH CLAMP KIT
72460033	WHEEL ASSY, CASTER, 13 X 6.50 - 6, BALL BRG
72490003	WHEEL, PLASTIC, SOLID



SPECS

SPECIFICATION

MODEL NAME
AND SKU

CATEGORY

FAMILY

CLASS

GENERATION

CONTROL PANEL

OPERATOR CONTROL

HOURLY METER

ENGINE

VENDOR

START TYPE

HORSEPOWER

PRODUCTIVITY

FORWARD SPEED

REVERSE SPEED

FUEL CAPACITY

MAX ACRES/HOUR

DRIVE SYSTEM

TYPE

MOTOR

PUMP

TRANSAXLE

TRANSMISSION

DETAILS

ZXT 52 61G8: WZXT52S61G8E1B
ZXT 52 FXT00: WZXT52SFXT001B
ZXT 61 61G8: WZXT61S61G8E1B
ZXT 61 FXT00: WZXT61SFXT001B
ZXT 72 61G8: WZXT72S61G8E1B
ZXT 72 FXT00: WZXT72SFXT001B

MID-MOUNT

ZXT

HEAVY-DUTY

GEN 1

OVER THE LAP CONTROLS

DIGITAL

61G8: BRIGGS & STRATTON | FXT00: KAWASAKI

ELECTRIC

61G8: 40HP | FXT00: 38.5HP

13 MPH

7 MPH

15.5 GAL

52": 6.83 | 61": 8.01 | 72": 9.45

HYDRO

HYDRO-GEAR 18 CU-IN PLANETARY DRIVE

HYDRO-GEAR 16 CC WITH FANS

N/A

N/A

SPECIFICATION

DECK

DECK SIZE	52 IN 61 IN 72 IN
DECK TYPE	FLOATING-SIDE DISCHARGE
CONFIGURATION	AERO CORE
LIFT SYSTEM	FOOT PEDAL OPERATED
BLADE QUANTITY	3
BLADE LENGTH	52": 18 IN 61": 21 IN 72": 24.5 IN
MIN. CUT HEIGHT	1.5 IN
MAX CUT HEIGHT	6 IN
STEEL GAUGE	7 GAUGE
SPINDLE TYPE	DUCTILE IRON

DIMENSIONS & WEIGHT

WEIGHT	BOTH 52" MODELS: 1491 LB BOTH 61" MODELS: 1521 LB BOTH 72" MODELS: 1551 LB
LENGTH	BOTH 52" MODELS: 82.5 IN BOTH 61" MODELS: 83.5 IN BOTH 72" MODELS: 84.5 IN
WIDTH WITH DEFLECTOR DOWN	BOTH 52" MODELS: 65.5 IN BOTH 61" MODELS: 74.5 IN BOTH 72" MODELS: 85 IN
WIDTH WITH DEFLECTOR UP	BOTH 52" MODELS: 53 IN BOTH 61" MODELS: 62 IN BOTH 72" MODELS: 73 IN

CASTER WHEELS

RIM DIAMETER	6 IN
TIRE DIAMETER	13 IN
TIRE WIDTH	6.5 IN

REAR WHEELS

RIM DIAMETER	12 IN
TIRE DIAMETER	26 IN
TIRE WIDTH	14 IN

ZXL

52"

61"



KEY FEATURES

- Ideal for trailering, climbing curbs, and maintaining resale value with its large size frame, heavy bumper, and casters like the ZXT.
- Hydro-Gear ZT4400 transaxle is very responsive, making the machine feel agile and nimble.
- Foot-controlled deck lift, deck release latch, and parking brake keep hands on controls and save time.
- Fully adjustable suspension seat for added comfort.
- Easy access to maintenance with the seat folded up.
- Control panel with charging port and a simple electrical system means less can go wrong.
- ROPS folds down within the length of the mower, preventing damage to the side of a house when turning away.
- Heavy-duty engine guard fenders are rounded to prevent rear end swing damage to houses or fences.
- Rear guard extends below and protects filters and muffler from getting punctured by curbs, stumps, or floor jacks.
- Engine bay has large bypass openings on the sides for excellent engine air cooling and debris removal.
- Dual deck belts significantly extend the life of the belts.

52"

- Kawasaki | FX820 EVO | 34.5HP
- Kawasaki | FX850 | 27HP

61"

- Kawasaki | FX820 EVO | 34.5HP
- Kawasaki | FX850 | 27HP

**Engine/
Deck Options**

Transaxle
Hydro-Gear
ZT-4400

Drivetrain

Fuel Capacity
15.5 gal

Acres/Hour
52: 5.5
61: 6.6

Speed
12 mph

Productivity

Rear
52: 24 x 9.5-12
61: 24 x 12-12

Front
13 x 6.5-6

Tires

Length / Width
52: 78" / 53"
61: 78" / 62"

Weight (lbs.)
52: 1250
61: 1300 - 1310

Dimensions

Cut Height Range
1.5" - 6"

Type
Floating-side discharge

Construction
Aero Core™, 7 Gauge Steel

Lift System
Foot Pedal Operated

Blades
52: 18" (3) | 61: 21" (3)

Deck



ACCESSORIES

PART NUMBER	ACCESSORY
N/A	TRIMMER
N/A	MOWER JACK ADAPTOR
N/A	FIRE EXT. MOUNTING BRACKET
93460215	BLOCK PLATE
95420008	LIGHT POD KIT
N/A	WEIGHT KIT
N/A	COLLECTION BAG
95490023	COLLECTION BUCKET
INCLUDED	STRIPE KIT
36490013	15W-50 HYDRO OIL
39410411	HYDRO FILTER



PART NUMBER

PART DESCRIPTION

77410015	BEARING, BALL 1630
71460109	BEARING, BALL, 6206-2RLD-C3, CUSTOM GREASE
77410035	BEARING, BALL, CASTER WHEELS
96460219	BELT GUIDE
71460196	BELT, EPDM, 5L, 77.56 EL
71460197	BELT, EPDM, B SECTION 134.33 EL
71460198	BELT, EPDM, B SECTION 143.37 EL
71460200	BELT, EPDM, B SECTION 57.11 EL
71460201	BELT, EPDM, B SECTION 66.12 EL
71440001	BLADE, 18
71440003	BLADE, 21
71460111	BUSHING, H, SPLIT TAPERED, MODIFIED, 1
25410007	BUSHING, SYNTHETIC, 0.750ID X 0.875 X 0.8125
14990007	BUSHING, SYNTHETIC, 7/8ID X 1.140D X 1
17410007	CASTER WHEEL BEARING SHIELD
17460025	DUST CAP, PLASTIC, 2.75 OD
45410022	GROMMET, REMOTE VENT
18410012	KNOB, PLASTIC, T
15990003	MACHINE KEY 1/4 X 1/4 X 1
36490013	OIL, PREMIUM HYDRO, 1QT 15W50
93990003	PAINT, WRIGHT MOWER ORANGE, AEROSOL
71460211	PULLEY, FLAT IDLER, 6 X 1, SPLIT, 30MM BORE
77410018	ROD END, 5/16-24, STUD(LH/RH)
25410003	SPANNER, CIS BEARING
71460207	SPINDLE ASSEMBLY, BOLT ON
16460009	SPRING, DIE, 2.5
17460018	STRIPING RUBBER ADJUSTABLE 48/52
52420014	SWITCH, SEALED, BLADE, ON/OFF, RED
72460033	WHEEL ASSY, CASTER, 13 X 6.50 - 6, BALL BRG
72490003	WHEEL, PLASTIC, SOLID

ZXL SPECS

SPECIFICATION	DETAILS
MODEL NAME AND SKU	ZXL 52 FX820 EVO: WZXL52SFX8201B ZXL 52 FX850E: WZXL52SFX850E1B ZXL 61 FX820 EVO: WZXL61SFX8201B ZXL 61 FX850E: WZXL61SFX850E1B
CATEGORY	MID-MOUNT
FAMILY	ZXL
CLASS	HEAVY-DUTY
GENERATION	GEN 1
CONTROL PANEL	
OPERATOR CONTROL	OVER THE LAP CONTROLS
HOURLY METER	DIGITAL
ENGINE	
VENDOR	FX820 EVO: KAWASAKI FX850E: KAWASAKI
START TYPE	ELECTRIC
HORSEPOWER	FX820 EVO: 34.5HP FX850E: 27HP
PRODUCTIVITY	
FORWARD SPEED	12.5 MPH
REVERSE SPEED	8 MPH
FUEL CAPACITY	15.5 GAL
MAX ACRES/HOUR	52": 6.57 61": 7.7
DRIVE SYSTEM	
TYPE	HYDRO
MOTOR	N/A
PUMP	N/A
TRANSAXLE	HYDRO-GEAR ZT4400
TRANSMISSION	N/A

SPECIFICATION

DETAILS

DECK

DECK SIZE	52 IN 61 IN
DECK TYPE	FLOATING-SIDE DISCHARGE
CONFIGURATION	AERO CORE
LIFT SYSTEM	FOOT PEDAL OPERATED
BLADE QUANTITY	3
BLADE LENGTH	52": 18 IN 61": 21 IN
MIN. CUT HEIGHT	1.5 IN
MAX CUT HEIGHT	6 IN
STEEL GAUGE	7 GAUGE
SPINDLE TYPE	DUCTILE IRON

DIMENSIONS & WEIGHT

WEIGHT	BOTH 52" MODELS: 1250 LB ZXL 61 FX820 EVO: 1310 LB ZXL 61 FX850E: 1300 LB
LENGTH	52": 82.5 IN 62": 83 IN
WIDTH WITH DEFLECTOR DOWN	52": 65.5 IN 62": 74.5 IN
WIDTH WITH DEFLECTOR UP	52": 53 IN 62": 62 IN

CASTER WHEELS

RIM DIAMETER	6 IN
TIRE DIAMETER	13 IN
TIRE WIDTH	6.5 IN

REAR WHEELS

RIM DIAMETER	12 IN
TIRE DIAMETER	24 IN
TIRE WIDTH	52": 9.5 IN 62": 12 IN

VELKE™ LC

52"

61"



KEY FEATURES

- Same base features as the WVHC.
- Larger frame and undercarriage. Engine and handlebar further back for balance and control.
- Adjustable motor position width. 61" shipped in the wide position giving ultimate hillside traction. They can be adjusted to the narrow position for more deck overhang.
- 18" tires ideally sized for large frame walk behinds where the larger deck overlap provides great trim overhang.
- Larger, flat-free casters in sealed housings provides the ultimate durability and ride control.
- Dual deck belts reduce wear on the angled belt drive and insure that all idlers are on the slack side of the belt which significantly extends belt life.
- 52" and 61" decks equipped with stripe kits.
- Only offered in high powered engines.

52"

- Kawasaki | FX730 | 23.5HP

61"

- Kawasaki | FX730 | 23.5HP

**Engine/
Deck Options**

Pumps

Hydro-Gear
10 cc

Motors

12 cu-in

Drivetrain

Fuel Capacity

5.5 gal

Acres/Hour

52: 4.3

61: 5.1

Productivity

Speed

8.2 mph

Rear

18 x 8.5-8

Front

11 x 4-5

Tires

Length / Width

52: 81.5" / 53"

61: 84" / 62"

Weight (lbs.)

52: 705 - 740

61: 761 - 790

Dimensions

Cut Height Range

1.5" - 4.25"

Type

Floating-side discharge

Construction

Aero Core™, 7 Gauge Steel

Lift System

Shims, Floating Deck

Blades

52: 18" (3) | 61: 21" (3)

Deck

VELKE™ LC ACCESSORIES

PART NUMBER	ACCESSORY
N/A	TRIMMER
N/A	MOWER JACK ADAPTOR
98490021	FIRE EXT. MOUNTING BRACKET
93460215	BLOCK PLATE
95420008	LIGHT POD KIT
N/A	WEIGHT KIT
95410016	COLLECTION BAG
95490026	COLLECTION BUCKET
N/A	STRIPE KIT
36490013	15W-50 HYDRO OIL
34490002	HYDRO FILTER

PART NUMBER	PART DESCRIPTION
77410015	BEARING, BALL 1630
77410035	BEARING, BALL, CASTER WHEELS
77460002	BEARING, TAPERED, CASTER ARM
71460174	BELT, B SECTION, 118.45 EL
71460066	BELT, WRAPPED, A SECTION 55.24 EL
71460035	BELT, WRAPPED, B SECTION 106.04 EL
71460065	BELT, WRAPPED, B SECTION 57.04 EL
71440001	BELT, WRAPPED, B SECTION 66.04 EL
71440001	BLADE, 18
71440003	BLADE, 21
14990001	BUSHING, BRONZE 0.8830ID X 1.1240OD X 1L
17410007	CASTER WHEEL BEARING SHIELD
71410039	CLUTCH, 1 X 6.75, 125FT-LB CCW, W/ PIGTAIL
17460023	DUST CAP, METAL, LOW PROFILE
45410022	GROMMET, REMOTE VENT
34490002	HYDRO OIL FILTER 25 MICRON, NON-BYPASS
18410012	KNOB, PLASTIC, T
15990004	MACHINE KEY 5MM X 5MM X 25MM
36490013	OIL, PREMIUM HYDRO, 1QT 15W50
93990003	PAINT, WRIGHT MOWER ORANGE, AEROSOL
71460142	PULLEY, SNGL SPLIT, A/B, 15MM X 5.5 OD
77410008	ROD END, 5/16-24
77410009	ROD END, 5/16-24 LH
77460016	SEAL, 1.250 X 2.062 X.25
71460207	SPINDLE ASSEMBLY, BOLT ON
16460009	SPRING, DIE, 2.5
72410013	STUD FOR TAPERED HUB
52420008	SWITCH, IGN, ELECT START W/ BELL KEY
52420014	SWITCH, SEALED, BLADE, ON/OFF, RED
72490003	WHEEL, PLASTIC, SOLID

VELKE™ LC SPECS

SPECIFICATION

MODEL NAME
AND SKU

CATEGORY

FAMILY

CLASS

GENERATION

CONTROL PANEL

OPERATOR CONTROL

HOURLY METER

ENGINE

VENDOR

START TYPE

HORSEPOWER

PRODUCTIVITY

FORWARD SPEED

REVERSE SPEED

FUEL CAPACITY

MAX ACRES/HOUR

DRIVE SYSTEM

TYPE

MOTOR

PUMP

TRANSAXLE

TRANSMISSION

DETAILS

VELKE LARGE FRAME COMFORT GRIP 52 FX730E:
WVLC52SFX730E1B
VELKE LARGE FRAME COMFORT GRIP 61 FX730E:
WVLC61SFX730E1B

WALK-BEHIND

VELKE, LARGE FRAME, COMFORT GRIP

HEAVY-DUTY

GEN 1

UPWARDS FACING CONTROLS

DIGITAL

FX730E: KAWASAKI

ELECTRIC

23.5HP

8.2 MPH

2.5 MPH

5.5 GAL

52": 4.31 | 61": 5.05

HYDRO

DANFOSS 12 CU-IN

HYDRO-GEAR 10 CC

N/A

N/A

SPECIFICATION

DECK

DECK SIZE	52 IN 61 IN
DECK TYPE	FLOATING-SIDE DISCHARGE
CONFIGURATION	AERO CORE
LIFT SYSTEM	SHIMS, FLOATING DECK
BLADE QUANTITY	3
BLADE LENGTH	52": 18 IN 61": 21 IN
MIN. CUT HEIGHT	1.5 IN
MAX CUT HEIGHT	4.25 IN
STEEL GAUGE	7 GAUGE
SPINDLE TYPE	DUCTILE IRON

DIMENSIONS & WEIGHT

WEIGHT	VELKE LC 52 FX730E: 740 LB VELKE LC 61 FX730E: 790 LB
LENGTH	VELKE LC 52 FX730E: 81.5 IN VELKE LC 61 FX730E: 84 IN
WIDTH WITH DEFLECTOR DOWN	VELKE LC 52 FX730E: 65 IN VELKE LC 61 FX730E: 74 IN
WIDTH WITH DEFLECTOR UP	VELKE LC 52 FX730E: 53 IN VELKE LC 61 FX730E: 62 IN

CASTER WHEELS

RIM DIAMETER	5 IN
TIRE DIAMETER	11 IN
TIRE WIDTH	4 IN

REAR WHEELS

RIM DIAMETER	8 IN
TIRE DIAMETER	18 IN
TIRE WIDTH	8.5 IN

VELKE™ HC

36"

48"



KEY FEATURES

- Ergonomic grip controls mounted on rubber mounts to reduce impact and vibration.
- Adjustable pump return springs from "very soft" to "hill climbing."
- All models are ideally balanced without the need for extra weight.
- Handles positioned in a slightly flatter position for easier lifting over curbs.
- Floating decks can be easily adjusted using hard steel cross-drilled deck pins with 1/4" increments.
- Motor supports can be adjusted up or down for extended range and longer belt life in very high or low cutting regions.
- The HC and LC models share most of the same components. The main difference between them is the LC has a wide stance undercarriage that shifts the handlebar and engine deck assembly further back for better control and balance on larger decks. The LC also has larger caster wheels and sealed caster pivots.
- Ball bearing pivots without secondary pump linkages for precise and reliable control.
- Speed selector engages the brake when pulled all the way back, preventing engine kill if the brake is not released before selecting speed.
- "L" shaped handlebar assembly provides ample room for knees and feet when walking, while the inward-tilted handles protect hands from impact against fences or walls.
- Sully latch integrated into the handlebar makes stowing and releasing the Velke easy.
- Pump and motor system offers great durability and ground clearance for climbing curbs.

- Kawasaki | FX600 | 18.5HP

- Kawasaki | FX600 | 18.5HP

Engine/ Deck Options

Hydro-Gear
10 cc

12 cu-in

Drivetrain

5.5 gal

36: 2.4

48: 3.2

6.5 mph

Productivity

16 x 7.5-8

9 x 3.5-4

Tires

36: 75" / 36.5"

48: 74" / 49"

36: 570 - 584

48: 639 - 650

Dimensions

1.5" - 4.25"

Floating-side discharge

Aero Core™, 7 Gauge Steel

Shims, Floating Deck

36: 18" (2) | 48: 16.5" (3)

Deck

VELKE™ HC ACCESSORIES

PART NUMBER	ACCESSORY
N/A	TRIMMER
N/A	MOWER JACK ADAPTOR
98490021	FIRE EXT. MOUNTING BRACKET
93460215	BLOCK PLATE
95420008	LIGHT POD KIT
N/A	WEIGHT KIT
95410016	COLLECTION BAG
95490026	COLLECTION BUCKET
N/A	STRIPE KIT
36490013	15W-50 HYDRO OIL
34490002	HYDRO FILTER



PART NUMBER	PART DESCRIPTION
77410015	BEARING, BALL 1630
71460036	BELT, EPDM, B SECTION 123.04 EL
71460066	BELT, WRAPPED, A SECTION 55.24 EL
71460107	BELT, WRAPPED, B SECTION 84.04 EL
71440002	BLADE, 16 1/2
71440001	BLADE, 18
14990002	BUSHING, BRONZE 0.5060ID X 0.7480OD X 1L
14990001	BUSHING, BRONZE 0.8830ID X 1.1240OD X 1L
71460111	BUSHING, H, SPLIT TAPERED, MODIFIED, 1
71410039	CLUTCH, 1 X 6.75, 125FT-LB CCW, W/ PIGTAIL
45410029	GROMMET, PICKUP, ORANGE, FLEX
45410022	GROMMET, REMOTE VENT
34490002	HYDRO OIL FILTER 25 MICRON, NON-BYPASS
18410012	KNOB, PLASTIC, T
15990003	MACHINE KEY 1/4 X 1/4 X 1
15990004	MACHINE KEY 5MM X 5MM X 25MM
36490013	OIL, PREMIUM HYDRO, 1QT 15W50
93990003	PAINT, WRIGHT MOWER ORANGE, AEROSOL
71410038	PIGTAIL, CLUTCH 11.25
71460217	PULLEY, FLAT IDLER, 5 X 1 1/4, NO LIP
71460142	PULLEY, SNGL SPLIT, A/B, 15MM X 5.50D
77410008	ROD END, 5/16-24
77410009	ROD END, 5/16-24 LH
71460207	SPINDLE ASSEMBLY, BOLT ON
16460009	SPRING, DIE, 2.5
72410013	STUD FOR TAPERED HUB
52420008	SWITCH, IGN, ELECT START W/ BELL KEY
52420014	SWITCH, SEALED, BLADE, ON/OFF, RED
72410064	WHEEL HUB, 1IN SHAFT, NO OFFSET W/STUDS
72490003	WHEEL, PLASTIC, SOLID

VELKE™ HC SPECS

SPECIFICATION	DETAILS
MODEL NAME AND SKU	VELKE HYDROSTATIC COMFORT GRIP 36 FX600E: WVHC36SFX6001B VELKE HYDROSTATIC COMFORT GRIP 48 FX600E: WVHC48SFX6001B
CATEGORY	WALK-BEHIND
FAMILY	VELKE, HYDROSTATIC, COMFORT GRIP
CLASS	HEAVY-DUTY
GENERATION	GEN 1
CONTROL PANEL	
OPERATOR CONTROL	UPWARDS FACING CONTROLS
HOUR METER	DIGITAL
ENGINE	
VENDOR	FX600E: KAWASAKI
START TYPE	ELECTRIC
HORSEPOWER	19HP
PRODUCTIVITY	
FORWARD SPEED	6.5 MPH
REVERSE SPEED	2.5 MPH
FUEL CAPACITY	5.5 GAL
MAX ACRES/HOUR	36": 2.36 48": 3.15
DRIVE SYSTEM	
TYPE	HYDRO
MOTOR	DANFOSS 12 CU-IN
PUMP	HYDRO-GEAR 10 CC
TRANSAXLE	N/A
TRANSMISSION	N/A

SPECIFICATION

DECK

DECK SIZE	36 IN 48 IN
DECK TYPE	FLOATING-SIDE DISCHARGE
CONFIGURATION	AERO CORE
LIFT SYSTEM	SHIMS, FLOATING DECK
BLADE QUANTITY	2
BLADE LENGTH	36": 18 IN 48": 16.5 IN
MIN. CUT HEIGHT	1.5 IN
MAX CUT HEIGHT	4.25 IN
STEEL GAUGE	7 GAUGE
SPINDLE TYPE	DUCTILE IRON

DIMENSIONS & WEIGHT

WEIGHT	VELKE HC 36 FX600E: 580 LB VELKE HC 48 FX600E: 690 LB
LENGTH	VELKE HC 36 FX600E: 75 IN VELKE HC 48 FX600E: 74 IN
WIDTH WITH DEFLECTOR DOWN	VELKE HC 36 FX600E: 48.5 IN VELKE HC 48 FX600E: 61.5 IN
WIDTH WITH DEFLECTOR UP	VELKE HC 36 FX600E: 36.5 IN VELKE HC 48 FX600E: 49 IN

CASTER WHEELS

RIM DIAMETER	4 IN
TIRE DIAMETER	9 IN
TIRE WIDTH	3.5 IN

REAR WHEELS

RIM DIAMETER	8 IN
TIRE DIAMETER	16 IN
TIRE WIDTH	7.5 IN

THE FINISHING TOUCHES

GRASS COLLECTION ACCESSORIES

Our grass collection accessories are built to stand up to hard use, season after season. They're engineered to fit Wright mowers as well as other professional brands.

GRASS GOBBLER™



MOWER

GOBBLER™

Exmark Viking, Metro, E, S, X series.

GG450 / GGJ550

Gravely 2002 & later Pro G & H/Pro Turn, Pro Walk

WRJ300-3

Wright type Deere

JDJ500-HD

Ransomes/Bobcat 94' & Later

GG250

Ransomes/Bobcat 01' & Later Floating Deck

TE250 / TEJ350

Ransomes/Bobcat 01' & Fixed Deck

GG450 / GGJ550

Scag Advantage

SA200-2 / SAJ300-3

Scag Velocity

SVJ300-3

Ferris, Snapper, Simplicity (iCD type deck)

FSJ300-3

Toro Floating Deck 01' & Later & Turbo Force

TOJ350

Wright Original

WR200-2 / WRJ300-3

Wright Aero Core™

WRJ500-5

Leaf Gobbler™ fits all Jumbo

LG1000

*All models with "J" are Jumbo with 4.3 cu-ft


**All other models are regular with 3.3 cu-ft

POWERED BAGGERS



MOWER	WRIGHTVAC	TRAILER MOUNT	STAND-ON BRACKET	DECK SIZE	PULLEY KIT
LG	95320001	95320010	95320011	52	95320012
				61	95320013
ZK GEN 2	95320001	95320010	95320009	52	95320006
				61	95320007
				72	95320008
ZK GEN 3	95320001	95320010	95320017	52	95320014
				61	95320015
				72	95320016
ZXL	95320001	95320010	N/A	52	95320002
61				95320003	
ZXT				72	95320004

COLLECTION BAG

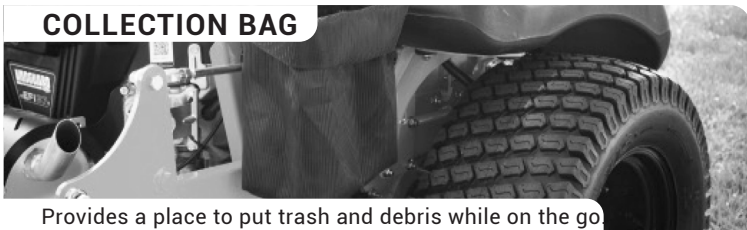

Provides a place to put trash and debris while on the go

PART NUMBER	MODEL
-------------	-------


95490014	STANDER X
----------	-----------

95490015	STANDER I & STANDER ZK
----------	------------------------

95490016	VELKE™ HC, VELKE™ LC & VELKE™ PISTOL GEAR
----------	---

95490020	STANDER B
----------	-----------

COLLECTION BUCKET

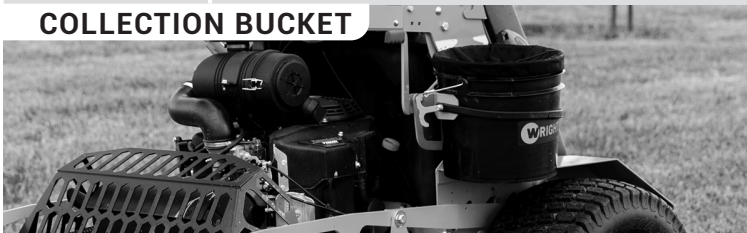

PART NUMBER	MODEL
-------------	-------

95490022	STANDER ZK & ZTO
----------	------------------

95490023	ZXT & ZXL
----------	-----------

95490024	STANDER X
----------	-----------

95490025	STANDER B
----------	-----------

95490026	VELKE HC & VELKE LC
----------	---------------------

95490027	STANDER I
----------	-----------

95490029	STANDER LG
----------	------------

MULCH KITS

A great alternative to collecting clippings and leaves. The recirculating baffles break down clippings into small and easily biodegradable pieces.

DECK SIZE	AERO CORE™	REG. 5" DECK	ZK-6" DEEP DECK-ONLY
32"	95460029	95480003	
36"	95480005	95470002	
42"	95480006	95480002	
48"	95430009	95430003	
52"	95440011	95440003	95440008
61"	95450011	95450003	95450007
72"	98460069	98460069	

BLADE TYPE	BLADE LENGTH	DECK SIZE	PART NUMBER
STANDARD	16 1/2"	32", 48"	71440002
	18"	36", 52"	71440001
	21"	42", 61"	71440003
	24 1/2"	72"	71440004
MULCHING	16 1/2"	32", 48"	71490001
	18"	36", 52"	71490002
	21"	42", 61"	71490003

NORTHERN GRASS BAFFLE KIT


Designed for northern climates, our Northern Grass Baffle Kit optimizes airflow to handle thicker, wetter grass with ease. It enhances cutting performance, ensuring a clean, efficient mow even in challenging conditions.

PART NUMBER	MODEL
98440015	52" NORTHERN GRASS/BAGGING BAFFLE KIT
98450014	61" NORTHERN GRASS/BAGGING BAFFLE KIT
98460089	72" NORTHERN GRASS/BAGGING BAFFLE KIT

BLADE CHART

STANDARD BLADES

BLADE SIZE	16-1/2"	18"	21"	24-1/2"
DECK SIZE	32, 48	36, 52	42, 61	72
PART NUMBER	71440002	71440001	71440003	71440014

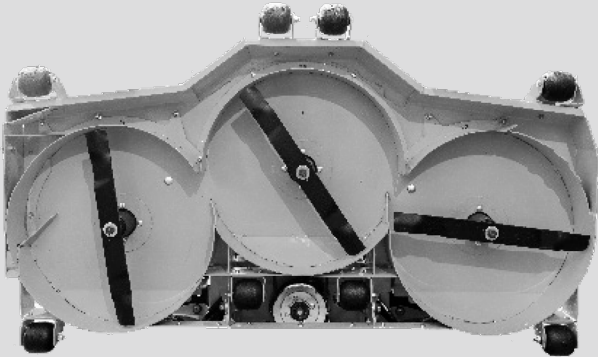

MULCHING BLADES

BLADE SIZE	16-1/2"	18"	21"	24-1/2"
DECK SIZE	32, 48	36, 52	42, 61	72
PART NUMBER	71490001	71490002	71490003	71490004

RIDE-BEHIND ACCESSORIES

Velke™ sulkies give operators a smoother, more comfortable ride, and help increase productivity. Each is engineered to work on Wright models as well as other professional mower brands.



VELKE SULKY™

P/N: **VK**; Velke™ Sulky, Pro 1

- Increases comfort and productivity
- Patented design keeps you closer to handles & away from obstacles
- Strong welded steel constructions
- Fits most professional brands
- Operator capacity of approximately 200lbs.



VELKE X2 SULKY™

P/N: **VKX2**; Velke™ Sulky, X-2

Same great features as the Velke™ Sulky, plus:

- Wide, open platform for greater operator comfort
- The only two wheel sulkie available
- Operator capacity of approximately 280lbs.

TIRE & TWEEL GUIDE

Use the Tweel™ guide below for approved applications.



TWEEL SIZE/TYPE	PART NUMBER	MOWER COMPATIBILITY
18.5" TWEEL	72410097	STANDER X
24" WHEEL	72410113	STANDER ZK & AUTO. ZK (ALL SIZES)
24" 5 LUG TWEEL	72410110	STANDER ZK (52")
24" 5 LUG TWEEL	72410098	ZK (61"/72") / LG (52"/61") / ZXL
24" DUAL TWEEL KIT	95410048	STANDER ZK (72")
24" DUAL WHEEL KIT	95410067	STANDER ZK (72")
26" 5 LUG TWEEL	72410103	ZXT (52"/61")
26" 5 LUG TWEEL	72410104	ZXT (61"/72")
26" DUAL TWEEL	95410050	ZXT (72")
26" DUAL WHEEL KIT	95410051	ZXT (72")




PARTS LOOKUP

In our pursuit of exceptional service, we are continuously improving our ways to simplify and save you time when it comes to your Wright mower.

As a result, we have created a robust parts lookup site for you to instantly find the part you are looking for on your Wright mower.

All you need is your mower serial number and a keyword.

 **SEARCH** ? 💬 📍

? NEW SITE HELP

× 🔍

*Can also search by Pump, Motor, Engine, or Trans. Serial

Recent Serials ▼

Filters ▼

Search Results (107)

Sort By
Rank ▼ ⇅ DESC





Image
Not
Available

parts.wrightmfg.com

LINEUP COMPARISON - STANDERS

SPECIFICATION	STANDER ZK	AUTONOMOUS ZK
CUTTER DECK	AERO CORE	AERO CORE
CUTTING WIDTHS	52" 61" 72"	61" 72"
CUTTING HEIGHT	1.5 - 5.5"	1.5 - 5.5"
SPINDLES	DUCTILE IRON	DUCTILE IRON
LIFT SYSTEM	QUICK-CUT	QUICK-CUT
FUEL CAPACITY	15.5 GAL	15.5 GAL
DRIVE SYSTEM	HYDRO	HYDRO
MOTOR	HYDRO-GEAR 15 CU-IN INTG. BRAKE, INDIVIDUAL HYDRO RESERVOIR	HYDRO-GEAR 15 CU-IN INTG. BRAKE, INDIVIDUAL HYDRO RESERVOIR
PUMPS	HYDRO-GEAR 16 CC WITH TAPERED SHAFT & FANS	HYDRO-GEAR 12 CC WITH HSA & FANS
TRANSAXLE	N/A	N/A
CASTER WHEEL DIAMETER	13"	13"
REAR WHEEL DIAMETER	24"	24"
FORWARD SPEED	12.5 MPH	12.5 MPH
HORSEPOWER	34.5 HP 40 HP	40 HP

	STANDER LG	STANDER X	STANDER I	STANDER B
	AERO CORE	AERO CORE	AERO CORE	N/A
	52" 61"	48" 52"	36" 42"	32" 36" 48" 52"
	1.75 - 5.75"	1.5 - 5.5"	1.5 - 5"	2 - 5"
	DUCTILE IRON	DUCTILE IRON	DUCTILE IRON	ALUMINUM
	QUICK CUT	QUICK-CUT	QUICK-CUT	QUICK-CUT
	11 GAL	8 GAL	5.5 GAL	5 GAL
	HYDRO	HYDRO	HYDRO	HYDRO
	N/A	PARKER 16 CU-IN	DANFOSS 12 CU-IN	N/A
	N/A	HYDRO-GEAR 12CC WITH FANS	HYDRO-GEAR 10 CC	N/A
	HYDRO-GEAR ZT4400	N/A	N/A	HYDRO-GEAR ZT3100
	13"	13"	11"	11"
	24"	20"	18"	20"
	12.5 MPH	9.5 MPH	8.2 MPH	7 MPH
	27 HP 34.5 HP	23.5 HP	19 HP	19 HP 22 HP

LINEUP COMPARISON - RIDERS / WALK-BEH

SPECIFICATION	ZXT	ZXL
CUTTER DECK	AERO CORE	AERO CORE
CUTTING WIDTHS	52" 61" 72"	52" 61"
CUTTING HEIGHT	1.5 - 6"	1.5 - 6"
SPINDLES	DUCTILE IRON	DUCTILE IRON
LIFT SYSTEM	FOOT PEDAL OPERATED	FOOT PEDAL OPERATED
FUEL CAPACITY	15.5 GAL	15.5 GAL
DRIVE SYSTEM	HYDRO	HYDRO
MOTOR	HYDRO-GEAR 18 CU-IN PLANETARY DRIVE	N/A
PUMPS	HYDRO-GEAR 16 CC WITH FANS	N/A
TRANSAXLE	N/A	HYDRO-GEAR ZT4400
CASTER WHEEL DIAMETER	13"	13"
REAR WHEEL DIAMETER	26"	24"
FORWARD SPEED	13 MPH	12.5 MPH
HORSEPOWER	38.5 HP 40 HP	27 HP 34.5 HP

VELKE LC	VELKE HC
AERO CORE	N/A
52" 61"	36" 48"
1.5 - 4.25"	1.5 - 4.25"
DUCTILE IRON	DUCTILE IRON
SHIMS, FLOATING DECK	SHIMS, FLOATING DECK
5.5 GAL	5.5 GAL
HYDRO	HYDRO
DANFOSS 12 CU-IN	DANFOSS 12 CU-IN
HYDRO-GEAR 10 CC	HYDRO-GEAR 10 CC
N/A	N/A
11"	9"
18"	16"
8.2 MPH	6.5 MPH
23.5 HP	19 HP

PRICING - STANDERS

DECK	ENGINE	MODEL	MSRP	RETAIL
STANDER B				
32"	19.0 KAW FX600	WSB32SFX6001B	\$8,808	
36"	19.0 KAW FX600	WSB36SFX6001B	\$8,927	
48"	22.0 KAW FS651	WSB48SFS651E1B	\$8,808	
52"	22.0 KAW FS651	WSB52SFS651E1B	\$8,927	
STANDER I				
36"	19.0 KAW FX600	WSTN36SFX600E1B	\$11,308	
42"	19.0 KAW FX600	WSTN42SFX600E1B	\$11,427	
STANDER X				
48"	23.0 KAW FX730	WSTX48SFX730E2B	\$12,380	
52"	23.0 KAW FX730	WSTX52SFX730E2B	\$12,499	
STANDER LG				
52"	27.0 KAW FX850	WSLG52SFX8501B	\$14,046	
52"	34.5 KAW FX820 EFI	WSLG52SFX8201B	\$14,761	
61"	27.0 KAW FX850	WSLG61SFX8501B	\$14,285	
61"	34.5 KAW FX820 EFI	WSLG61SFX8201B	\$14,999	
STANDER ZK (GEN 2)				
52"	27.0 KAW FX850	WSZK52SFX850E-49S	\$15,832	
52"	37.0 VG EFI	WSZK52S61E8E2B	\$16,308	
52"	40.0 VG EFI	WSZK52S61G82B	\$16,427	
61"	27.0 KAW FX850	WSZK61SFX850E-49S	\$16,189	
61"	37.0 VG EFI	WSZK61S61E8E-49S	\$16,665	
61"	40 VG EFI	WSZK61S61G82B	\$16,785	
72"	37.0 VG EFI	WSZK72S61E8E-49S	\$17,261	
72"	40 VG EFI	WSZK72S61G82B	\$17,380	

DECK	ENGINE	MODEL	MSRP	RETAIL
STANDER ZK (GEN 3)				
52"	34.5 KAW FX820 EFI	WSZK52SFX8203B	\$16,665	
52"	40.0 VG EFI	WSZK52S61G83B	\$17,142	
61"	34.5 KAW FX820 EFI	WSZK61SFX8203B	\$17,023	
61"	40.0 VG EFI	WSZK61S61G83B	\$17,499	
72"	34.5 KAW FX820 EFI	WSZK72SFX8203B	\$17,618	
72"	40.0 VG EFI	WSZK72S61G83B	\$18,094	
AUTONOMOUS ZK				
61"	40.0 VG EFI	WSZK61M61G8E2BR	\$54,761	
72"	40.0 VG EFI	WSZK72M61G8E2BR	\$54,761	

PRICING - RIDERS / WALK-BEHINDS

DECK	ENGINE	MODEL	MSRP	RETAIL
ZXL				
52"	27.0 KAW FX850	WZXL52SFX850E1B	\$13,927	
52"	34.5 KAW FX820 EFI	WZXL52SFX8201B	\$14,642	
61"	27.0 KAW FX850	WZXL61SFX850E1B	\$14,285	
61"	34.5 KAW FX820 EFI	WZXL61SFX8201B	\$14,999	
61"	37.0 VG EFI	WZXL61S61E8E1B	\$14,880	
ZXT				
52"	38.5 KAW FX1000 EFI	WZXT52SFXT001B	\$19,285	
52"	40.0 VG EFI OG	WZXT52S61G8E1B	\$19,523	
61"	38.5 KAW FX1000 EFI	WZXT61SFXT001B	\$19,642	
61"	40.0 VG EFI OG	WZXT61S61G8E1B	\$19,880	
72"	38.5 KAW FX1000 EFI	WZXT72SFXT001B	\$20,237	
72"	40.0 VG EFI OG	WZXT72S61G8E1B	\$20,475	

DECK	ENGINE	MODEL	MSRP	RETAIL
VELKE LC & HC				
36"	19.0 KAW FX600	WVHC36SFX6001B	\$9,642	
48"	19.0 KAW FX600	WVHC48SFX6001B	\$9,880	
52"	23.5 KAW FX730	WVLC52SFX730E1B	\$11,308	
61"	23.5 KAW FX730	WVLC61SFX730E1B	\$11,665	



Wright Owners make up a community of people with many of the same goals: to build successful and reliable landscape businesses. We work to bring our partners together to share ideas and inspire each other to greater perfection. Wright Owners can sign up at wolf.wrightmfg.com as well as join our private Wright Owners Facebook group. We want to stay in touch, see your work, and hear your feedback—our future depends on it.

Stay connected with us!



Wright Mowers



@WrightMowers



@WrightMowers

Join our Wright Mower Dealer Group on Facebook:
www.facebook.com/groups/wrightdealers



Questions?

www.wrightmfg.com: To find detailed information about our mowers, Owner's Manuals, dealer locations, service documents, and more.

Sales@wrightmfg.com: For sales questions about mower models, accessories and more.

Service@wrightmfg.com: For service questions about parts, mowers, accessories, and more.

We provide a 2-year unlimited hour or 5 year 500 hour warranty (whichever comes first) for all new Wright mowers. A copy of the warranty can be found in the owner's manual included with the purchase of a mower, and is also available to download for free from the Wright website. Contact your local Wright dealer to schedule a warranty-covered service appointment.

NOTES





“

Your success is our goal.

Your profit is the spread between your price and your cost. It's a very simple concept with many complex nuances to doing it really well, which is the focus of our entire business. This means that our machines are designed to be especially productive and reliable with less maintenance and fatigue. We want to give you the best machine possible—we don't make the lowest cost machine, but we make the machine that allows you to get more done and be more successful. We believe your success is our success—we have a long history of working with healthy, profitable, and expanding landscape maintenance companies.

We would be honored to be part of **powering your success.**”

- Ed Wright, CEO

”

4600 WEDGEWOOD BLVD STE X
FREDERICK, MD 21703-7167
301-360-9810

©1997-2025 Wright Manufacturing, Inc.
All rights reserved. Stander, Intensity, ZK
& X are trademarks of Wright
Manufacturing, Inc.

P/N: 79550141